

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number
WO 02/25769 A1

(51) International Patent Classification⁷: **H01Q 1/22**,
1/24, 1/08, 9/04

(74) Agents: **BENNETT, David, E. et al.**; Coats & Bennett,
PLLC, P.O. Box 5, Raleigh, NC 27602 (US).

(21) International Application Number: **PCT/US01/26732**

(22) International Filing Date: **28 August 2001 (28.08.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/668,448 22 September 2000 (22.09.2000) **US**


(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L.M. ERICSSON [SE/SE]**;
Telefonplan, S-126 25 Stockholm (SE).

(81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**


(84) Designated States (regional): **ARIPO** patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), **Eurasian** patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), **European** patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), **OAPI** patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **INVERTED-F ANTENNA FOR FLIP-STYLE MOBILE TERMINALS**

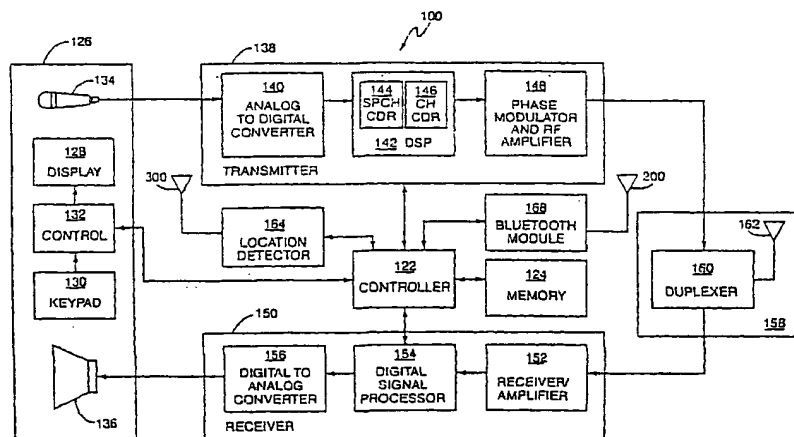

(57) Abstract: A flip or clam-shell style mobile terminal comprises a mechanical hinge that doubles as an inverted-F antenna for auxiliary communication purposes such as with a Bluetooth transceiver or a GPS receiver.

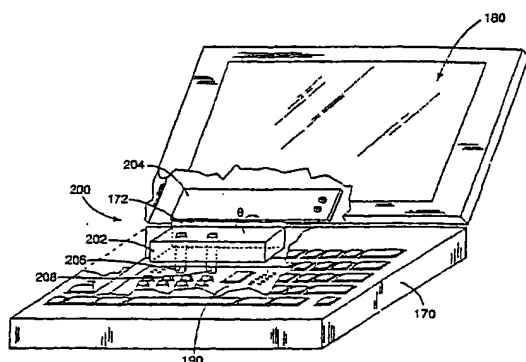

WO 02/25769 A1

Best Available Copy

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INVERTED-F ANTENNA FOR FLIP-STYLE MOBILE TERMINALS

BACKGROUND OF THE INVENTION

The present invention is directed to an antenna for use in a mobile terminal and particularly to an auxiliary antenna for use in a mobile terminal.

5 Mobile terminals, such as cellular phones, pagers, personal digital assistants, and the like have exploded into the public's consciousness. One recent innovation pioneered by a consortium of mobile terminal manufacturers is a communication technology called Bluetooth that operates in the ISM band at 2.4 to 2.485 GHz in the electromagnetic spectrum. Mobile terminals are being adapted to incorporate this technology. Mobile
10 terminals are also being adapted to operate with position detection systems, such as the Global Positioning System (GPS). GPS operates at 1.57542 GHz.

Due to the fact that these technologies operate at frequencies different from those normally associated with wireless communications, mobile terminals need additional, or at least different, antennas to function properly with these technologies.

15

BRIEF SUMMARY OF THE INVENTION

The present invention comprises using a mechanical hinge in a flip or clam-shell style mobile terminal as an inverted-F antenna for auxiliary communication purposes such as with a Bluetooth transceiver or a GPS receiver. In one embodiment, a first part of the
20 hinge (a first hinge plate) is attached to the signal line of the RF printed circuit board of the mobile terminal by a fastener such as a screw. A second screw adjacent to the first screw is attached between the ground of the RF printed circuit board and the hinge. Together the first part and the two screws form an inverted-F antenna. A second part of the hinge (a second hinge plate) is coupled to the first part and forms the remainder of the
25 mechanical hinge. In some embodiments, meanders are used to lengthen the electrical length of the first part so as to achieve an optimal operating frequency.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a communication environment that may include a wireless network for use with the present invention;

5 Figure 2 illustrates a mobile terminal that may be adapted for use with the present invention;

Figure 3 illustrates a perspective view of a flip-type mobile terminal suitable for use with the present invention;

Figure 4 illustrates one embodiment of an antenna constructed according to the present invention; and

10 Figure 5 illustrates a second embodiment of an antenna with meanders constructed according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is directed to an improved antenna arrangement in flip-type mobile terminals. In particular, the present invention provides an inverted F-antenna
15 integrated into a hinge. A "hinge" as used herein includes both hinge plates and pivot area. It should be appreciated that while the hinges illustrated herein include a pin as the pivot, they may also be living hinges if needed or desired. This additional antenna allows the mobile terminal to communicate at another frequency while allowing isolation between
20 the antennas of the mobile terminal to reduce crosstalk and other electromagnetic interference.

As illustrated in Figure 1, a communication environment 10 may include a mobile network 40, a location detection network 70, and a Bluetooth network 80. A mobile terminal 100 may be positioned in one or more of these networks.

25 Mobile network 40 may comprise, amongst other elements, an MSC 42 and a base station 50. MSC 42 may be communicatively coupled to the Public Switched Telephone Network (PSTN) 20 or other mobile networks 40 within the Public Land Mobile

Network (PLMN, not shown) as is conventional. The operation of mobile network 40, and mobile terminal 100 within the mobile network 40, are well documented in various standards such as TIA/EIA-136, Digital Advance Mobile Phone Service (D-AMPS), European Total Access Communication System (ETACS), Code Division Multiple Access (CDMA), Global System for Mobile Communication (GSM), Pacific Digital Cellular (PDC), and the like, the standards and documentation of which are herein incorporated by reference.

Location detection network 70 may be a satellite-based system, a terrestrial system or some hybrid thereof. Location detection network 70 is illustrated as a satellite system comprising one or more satellites 72. The most common location detection system is the Global Positioning System (GPS), although the Russian equivalent, GLONASS, is another option. Other systems may likewise be available. Typically, satellites 72 communicate with mobile terminals 100 over a different frequency than that on which the mobile terminals 100 communicate with the mobile network 40. For example, GPS satellites communicate at 1.57542 GHz. The GPS standards are partially publicly available at <http://www.navcen.uscg.mil/pubs/gps/icd200/icd200c.pdf> and are hereby incorporated by reference.

Bluetooth network 80 may comprise a Bluetooth enabled computer 82 or other Bluetooth enabled device such as another mobile terminal 100, a vehicle or the like as needed or desired. Bluetooth is well documented at www.bluetooth.com. In particular, the specifications, volumes 1 and 2 are hereby incorporated by reference in their entirety. These are publicly available at <http://www.bluetooth.com/developer/specification/specification.asp>. Bluetooth communications likewise communicate with mobile terminals 100 over a different frequency than that on which the mobile terminals 100 communicate with the mobile network 40. In particular, Bluetooth enabled devices communicate at approximately 2.4 GHz in the ISM band.

The present invention is adapted for use in the mobile terminal 100 to enable mobile terminal 100 to communicate with the various networks within communication environment 10. However, a more complete understanding of the mobile terminal 100 may be helpful. Turning now to Fig. 2, a block diagram of a mobile terminal 100 is illustrated. Mobile terminal 100 typically includes a controller 122, an operator interface 126, a transmitter 138, a receiver 150, and a primary antenna assembly 158. Operator interface 126 typically includes a display 128, keypad 130, interface control 132, microphone 134, and a speaker 136. Display 128 allows the operator to see dialed digits, call status, and other service information. Keypad 130 allows the operator to dial numbers, enter commands, and select options. Interface control 132 interfaces the display 128 and keypad 130 with the controller 122. Microphone 134 receives acoustic signals from the user and converts the acoustic signals to an analog electrical signal. Speaker 136 converts analog electrical signals from the receiver 150 to acoustic signals that can be heard by the user.

The analog electrical signal from the microphone 134 is supplied to the transmitter 138. Transmitter 138 includes an analog to digital converter 140, a digital signal processor 142, and a phase modulator and RF amplifier 148. Analog to digital converter 140 changes the analog electrical signal from the microphone 134 into a digital signal. The digital signal is passed to the digital signal processor (DSP) 142, which contains a speech coder 144 and channel coder 146. Speech coder 144 compresses the digital signal and the channel coder 146 inserts error detection, error correction and signaling information. DSP 142 may include, or may work in conjunction with, a DTMF tone generator (not shown). The compressed and encoded signal from the digital signal processor 142 is passed to the phase modulator and RF amplifier 148, which are shown as a combined unit in Figure 2. The modulator converts the signal to a form that is suitable for transmission on an RF carrier. RF amplifier 148 then boosts the output of the modulator for transmission via the primary antenna assembly 158.

Receiver 150 includes a receiver/amplifier 152, digital signal processor 154, and a digital to analog converter 156. Signals received by the primary antenna assembly 158 are passed to the receiver/amplifier 152, which shifts the frequency spectrum, and boosts the low-level RF signal to a level appropriate for input to the digital signal processor 154.

5 Digital signal processor 154 typically includes an equalizer to compensate for phase and amplitude distortions in the channel corrupted signal, a demodulator for extracting bit sequences from the received signal, and a detector for determining transmitted bits based on the extracted sequences. A channel decoder detects and corrects channel errors in the received signal. The channel decoder also includes logic
10 for separating control and signaling data from speech data. Control and signaling data are passed to the controller 122. Speech data is processed by a speech decoder and passed to the digital to analog converter 156. Digital signal processor 154, may include, or may work in conjunction with, a DTMF tone detector (not shown). Digital to analog converter 156 converts the speech data into an analog signal that is applied to the
15 speaker 136 to generate acoustic signals that can be heard by the user.

Together, the transmitter 138 and the receiver 150 are referred to herein as a voice communication transceiver.

Primary antenna assembly 158 is connected to the RF amplifier of the transmitter 138 and to the receiver/amplifier 152 of the receiver 150. Primary antenna assembly 158
20 typically includes a duplexer 160 and an antenna 162. Duplexer 160 permits full duplex communications over the antenna 162.

Controller 122 coordinates the operation of the transmitter 138 and the receiver 150, and may for instance take the form of a typical microprocessor. This microprocessor may be a dedicated or shared microprocessor and may be a single processor or multiple
25 parallel processors as needed or desired. This coordination includes power control, channel selection, timing, as well as a host of other functions known in the art. Controller 122 inserts signaling messages into the transmitted signals and extracts signaling

messages from the received signals. Controller 122 responds to any base station commands contained in the signaling messages, and implements those commands.

When the user enters commands via the keypad 130, the commands are transferred to the controller 122 for action. Memory 124 stores and supplies information at the direction
5 of the controller 122 and preferably includes both volatile and non-volatile portions. It is expected that controller 122 and memory 124 as well as many of the other processing components described herein will be positioned on a printed circuit board 190 (Figure 4) as is conventional.

In addition to the above-described elements, the mobile terminal 100 may also
10 include a location detector 164 in communication with the controller 122. Location detector 164 may have its own antenna 300 discussed below. Location detector 164 may be a Global Positioning System (GPS) receiver or other satellite or terrestrial system as needed or desired. Typically, the location detector 164 will output a geocoordinate expressed as longitude, latitude, and, optionally, altitude coordinates corresponding to the
15 present location of the mobile terminal 100.

Mobile terminal 100 may also include a Bluetooth module 168 together with Bluetooth antenna 200. Bluetooth is discussed above and reference is made thereto. Bluetooth module 168 is designed to comply with the standards set forth for Bluetooth and enable wireless communication at approximately 2.4 GHz between Bluetooth
20 enabled devices. Controller 122 may control Bluetooth module 168 as needed or desired.

As noted, various antennas may be associated with the mobile terminal 100. Antennas operate most efficiently when they are one quarter the length of the signal desired to be received. Thus, to facilitate proper communication in a mobile terminal 100
25 amongst the various networks 40, 70, and 80, it may be desirable to have three different antennas. Further, many mobile terminals 100 are already designed to operate in two or three modes so as to communicate with different mobile networks 40 that may employ

different standards alternatively requiring more antennas. Typically, a mobile terminal 100 may operate at one or more of the following frequency ranges: 824 –894 MHz, 880-960 MHz, 1710-1880 MHz, and 1850-1990 MHz, depending on which standards with which it complies.

5 It is known to add antennas having the desired length to mobile terminals 100 to add additional functionality. However, these additional antennas require additional circuitry and additional space in or about the mobile terminals. Further, the antennas must be separated sufficiently to insure proper mutual isolation so as to reduce crosstalk or other forms of electromagnetic interference. While filters can be used to reduce
10 crosstalk, filters for closely spaced antennas tend to be bulky and relatively expensive to achieve the performance required. Alternatively a "window" may be created which allows an internally positioned antenna to communicate through the body 170 (Fig. 3) of the mobile terminal 100. However, this imposes additional undesirable constraints on circuit board design. Thus, for antennas for Bluetooth or GPS applications, especial care must
15 be taken to not interfere with the primary cellular antenna assembly 158.

 A mobile terminal 100 incorporating the present invention is illustrated in a perspective view in Figure 3. Mobile terminal 100 is a flip-type or clamshell-type mobile terminal having a body 170 and a flip portion 180 hingedly connected one to the other by hinges 172 and 174. It should be appreciated that in some embodiments, only one hinge
20 172 may connect the flip portion 180 to the body 170. Display 128 may be mounted on the mobile terminal 100, and, in this case, on the flip portion 180. However, it should be appreciated, that in some mobile terminals 100, such as a cellular phone, the flip portion 180 may have no additional components. Mobile terminal 100 may also comprise a keypad 130, a microphone 134 and a speaker mounted on body 170. Again, it should be
25 appreciated that some or all of these components instead could be mounted on the flip portion 180 if needed or desired. Primary antenna assembly 158 is shown as a stub

antenna, but may include other classes of external or internal antennas designed to operate at conventional cellular frequencies or the like.

It should be appreciated that the term "mobile terminal" may include a cellular radiotelephone with or without a multi-line display; a Personal Communications System (PCS) terminal that may combine a cellular radiotelephone with data processing, facsimile and data communications capabilities; a PDA that can include a radiotelephone, pager, Internet/intranet access, Web browser, organizer, and/or calendar; and a conventional laptop and/or palmtop receiver or other appliance that includes a radiotelephone transceiver. Mobile terminals may also be referred to as "pervasive computing" devices. Thus, while the present discussion may be couched in terms of a phone and/or a laptop computer, the present invention is equally applicable to these other sorts of devices. The previous discussion was by way of example, and not intended to be limiting on the definition of a mobile terminal.

The present invention uses hinges 172 and/or 174 to act as the antennas for location detector 164 and/or the Bluetooth module 168. While such applications may be of primary commercial importance at the present time, it should be appreciated that an antenna created within the hinges 172 or 174 may equally be adapted for other purposes or devices within the mobile terminal 100, such as Asia's i-Mode, another frequency antenna to make the mobile terminal 100 dual-mode or even tri-mode, or the like as needed or desired. Further, in mobile terminals 100 that include two hinges 172, 174, both hinges may be changed to antenna hinges according to the present invention. For example, a first hinge 172 could be adapted for Bluetooth performance and a second hinge 174 adapted for GPS reception. Other permutations on this concept will be readily apparent to those of ordinary skill in the art.

Figure 4 illustrates a first embodiment of the present invention. In particular, a hinge, for the purposes of illustration, hinge 172, connects the flip portion 180 to the body 170 of the mobile terminal 100. Hinge 172 is formed from two parts, a first part 202 and a

second part 204. In the event the flip portion 180 includes a display 128, hinge 172 is constructed to allow a flex-film line (constructed of a suitable polyimide material) to carry signals to the display from the body 170 and particularly from the controller 122 on the printed circuit board 190.

5 First part 202 is spaced from and attached to the printed circuit board 190 by two fasteners 206 and 208 respectively. Together, the first part 202 and the fasteners 206, 208 form an inverted-F antenna. Suitable fasteners include screws or the like. Thus, the shank of the screw may space the first part 202 from the printed circuit board 190. One fastener 206 acts as a connection to the ground plane of the printed circuit board 190.

10 The other fastener 208 acts as a the RF feed for the antenna 200, connecting antenna 200 to the appropriate circuitry on the printed circuit board 190 such as the location detector 164 or the Bluetooth module 168. Note that choosing which fastener acts as the ground connection and which acts as the RF signal connection is well understood. It should be appreciated that the ground feed and the RF feed could alternatively be

15 provided by another structure that does not fasten the antenna 200 to the printed circuit board and that the antenna 200 may be held in place by fastening the antenna 200 to the body 170 of the mobile terminal 100. It should be appreciated that the first part 202 and the fasteners 206 and 208 need to be capable of receiving electromagnetic signals, and thus are likely to be metal. Further, the spacing of the fasteners 206, 208 may be varied

20 to achieve impedance matching or otherwise improve performance.

While dimensions of the hinge 172 are not critical to the present invention, sample appropriate dimensions are as follows: first part 202 length 25 mm, height 4 mm, and width 5 mm; second part 204 length 30 mm, height 0.02 mm, and width 7 mm. In general, the size of the two parts 202 and 204 will be dictated by the mechanical strength

25 requirements of the hinge 172. Angle Θ represents the angle between first part 202 and second part 204. In one embodiment, antenna 200 should function as desired regardless

of the angle Θ . This, however, may be somewhat dependent upon the operating frequency of the antenna 200.

A second embodiment is illustrated in Figure 5. In this embodiment, especially adapted for GPS reception, antenna 300 comprises a first part 302 and a second part 304. Similarly to the previous embodiment, one fastener (not shown) may connect part 302 to the signal line of the RF printed circuit board and another fastener (not shown) may connect the ground of the RF printed circuit board to part 302 is required. This has been achieved here using plates 320, 322 respectively as illustrated. Note that plate 320 may be thicker than plate 322. First part 302 includes a meander 310 to make it electrically longer without changing the axial length of the first part 302. Second part 306 may likewise be coated with a plastic film so as not to short out the meanders 310 when the hinge 172 is in a closed position. For a further discussion of meander antennas in the field of mobile terminals, reference is made to application serial number 09/089,433, which is hereby incorporated by reference in its entirety. Alternatively, a film may be positioned atop meanders 310 to perform the same function. Other alternate techniques to isolate the parts 304 and 306 may also occur to those of ordinary skill in the art.

The present invention may, of course, be carried out in other specific ways than those herein set forth without departing from the scope and the essential characteristics of the invention. The present embodiments are therefore to be construed in all aspects as illustrative and not restrictive and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

CLAIMS

What is claimed is:

1. A mobile terminal comprising:

a body;

a flip portion; and

a hinge connecting said body to said flip portion, said hinge comprising an antenna for use by an electronic circuit positioned within said mobile terminal.

2. The mobile terminal of claim 1 wherein said antenna is an inverted-F antenna.

3. The mobile terminal of claim 1 wherein said antenna is operative at frequencies between 2.4 and 2.485 GHz.

4. The mobile terminal of claim 1 wherein said antenna operates within the ISM band.

5. The mobile terminal of claim 1 wherein said antenna receives a GPS signal.

6. The mobile terminal of claim 1 further comprising a second hinge forming a second antenna.

7. The mobile terminal of claim 6 wherein said first antenna is adapted for use at frequencies ranging from 2.4 to 2.485 GHz and said second antenna is adapted for receiving a GPS signal.

8. The mobile terminal of claim 1 further comprising a printed circuit board adapted to hold said electronic circuit.

9. The mobile terminal of claim 8 further comprising a fastener attaching said antenna to said printed circuit board.

5 10. The mobile terminal of claim 9 wherein said fastener is a screw.

11. The mobile terminal of claim 10 further comprising a second fastener attaching said antenna to said printed circuit board.

10 12. The mobile terminal of claim 11 wherein one of said fasteners acts as a connection to ground for said antenna and the other of said fasteners acts as an RF feed for said antenna.

13. A method of constructing a mobile terminal, comprising:
15 positioning a printed circuit board in the mobile terminal;
 fastening an antenna to said printed circuit board; and
 using said antenna as a hinge for a flip portion of said mobile terminal.

14. The method of claim 13 wherein fastening an antenna to said printed circuit
20 board comprises fastening an inverted-F antenna to said printed circuit board.

15. The method of claim 13 further comprising receiving and transmitting Bluetooth communications through said antenna.

25 16. The method of claim 13 further comprising receiving a GPS signal through said antenna.

17. The method of claim 13 wherein fastening an antenna to said printed circuit board comprises using a first fastener as a connection to ground and using a second fastener as an RF feed.

5 18. The method of claim 13 further comprising opening and closing said hinge during operation of the mobile terminal.

19. A mobile terminal comprising:

a body;

10 a printed circuit board positioned inside said body;

a flip portion; and

a hinge, said hinge forming an inverted-F antenna and hingedly securing said flip portion to said body, said hinge electrically coupled to said printed circuit board.

15 20. The mobile terminal of claim 19 further comprising a voice communication transceiver and a second antenna adapted for use with said voice communication transceiver, said voice communication transceiver positioned within said body, and said second antenna spaced from said inverted-F antenna.

20 21. A method of constructing a mobile terminal, comprising:
connecting a flip portion to a body portion of the mobile terminal using a hinge that also comprises an antenna.

22. A mobile terminal comprising:

25 a body;

a printed circuit board positioned within said body;

electronic circuitry positioned on said printed circuit board;

at least one antenna for voice communications at a first operating frequency, said at least one antenna operatively connected to said electronic circuitry;

a flip portion;

5 a hinge comprising an auxiliary antenna connecting said flip portion to said body, said antenna operatively connected to said electronic circuitry, said auxiliary antenna for communication at a second operating frequency.

23. The mobile terminal of claim 22 wherein said auxiliary antenna comprises a GPS receiver antenna.

10

24. The mobile terminal of claim 22 wherein said auxiliary antenna comprises a bluetooth antenna.

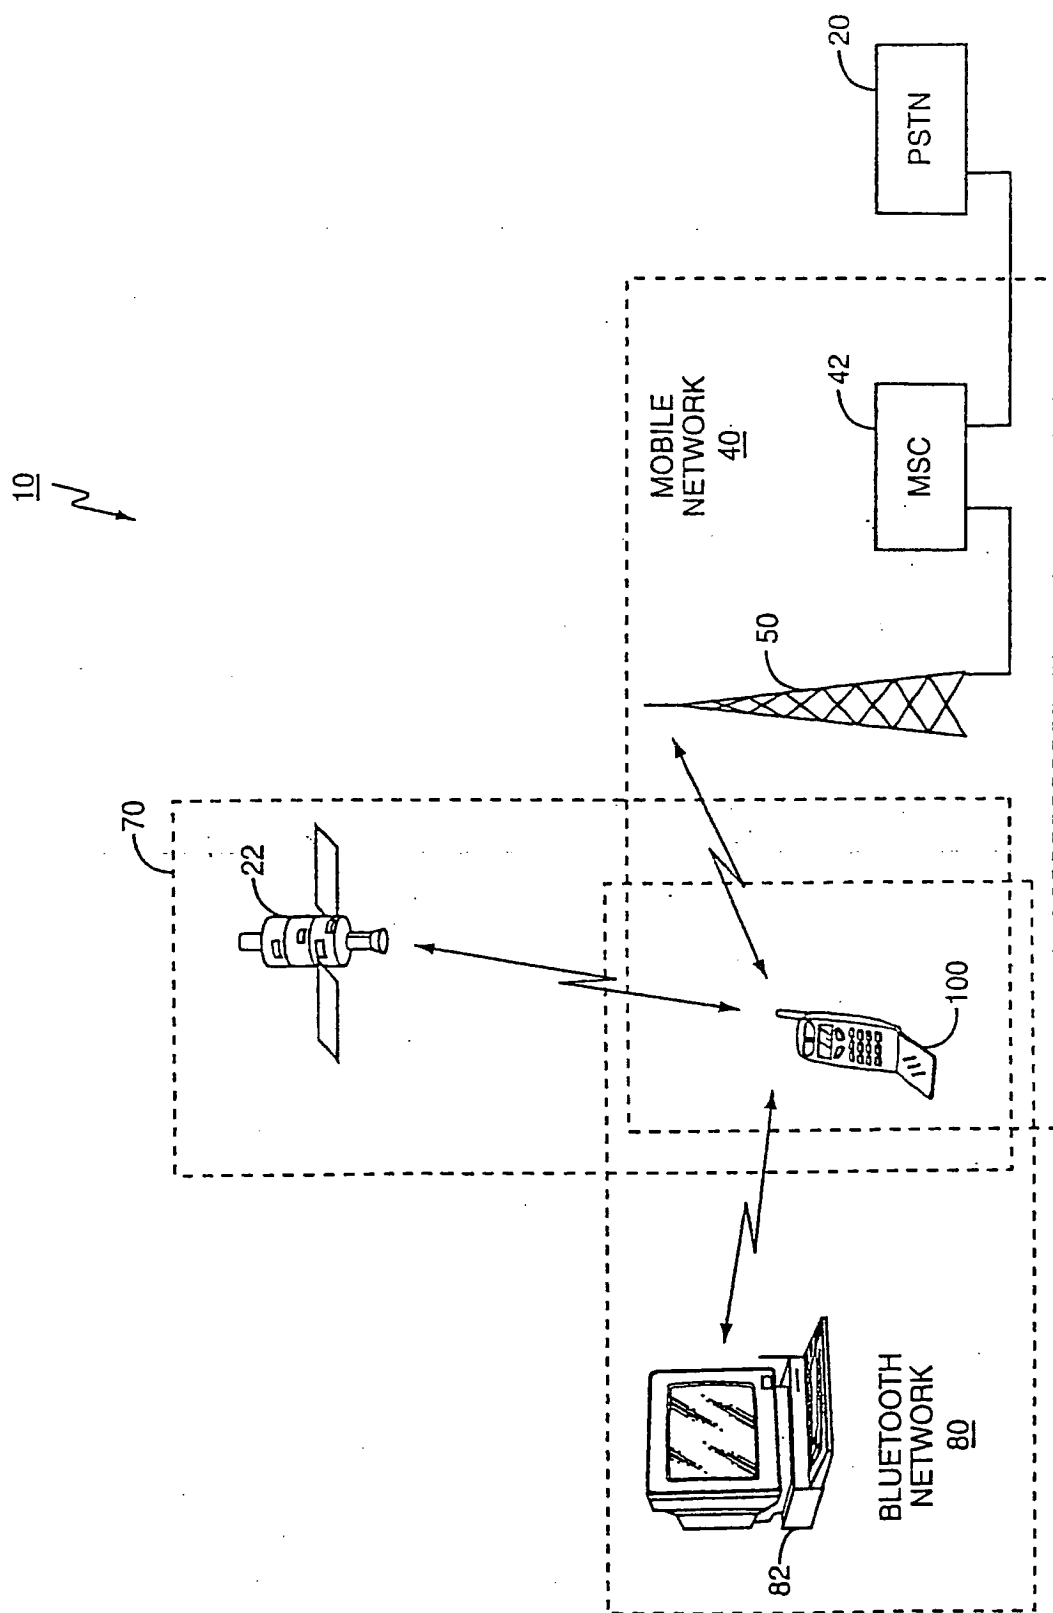


FIG. 1

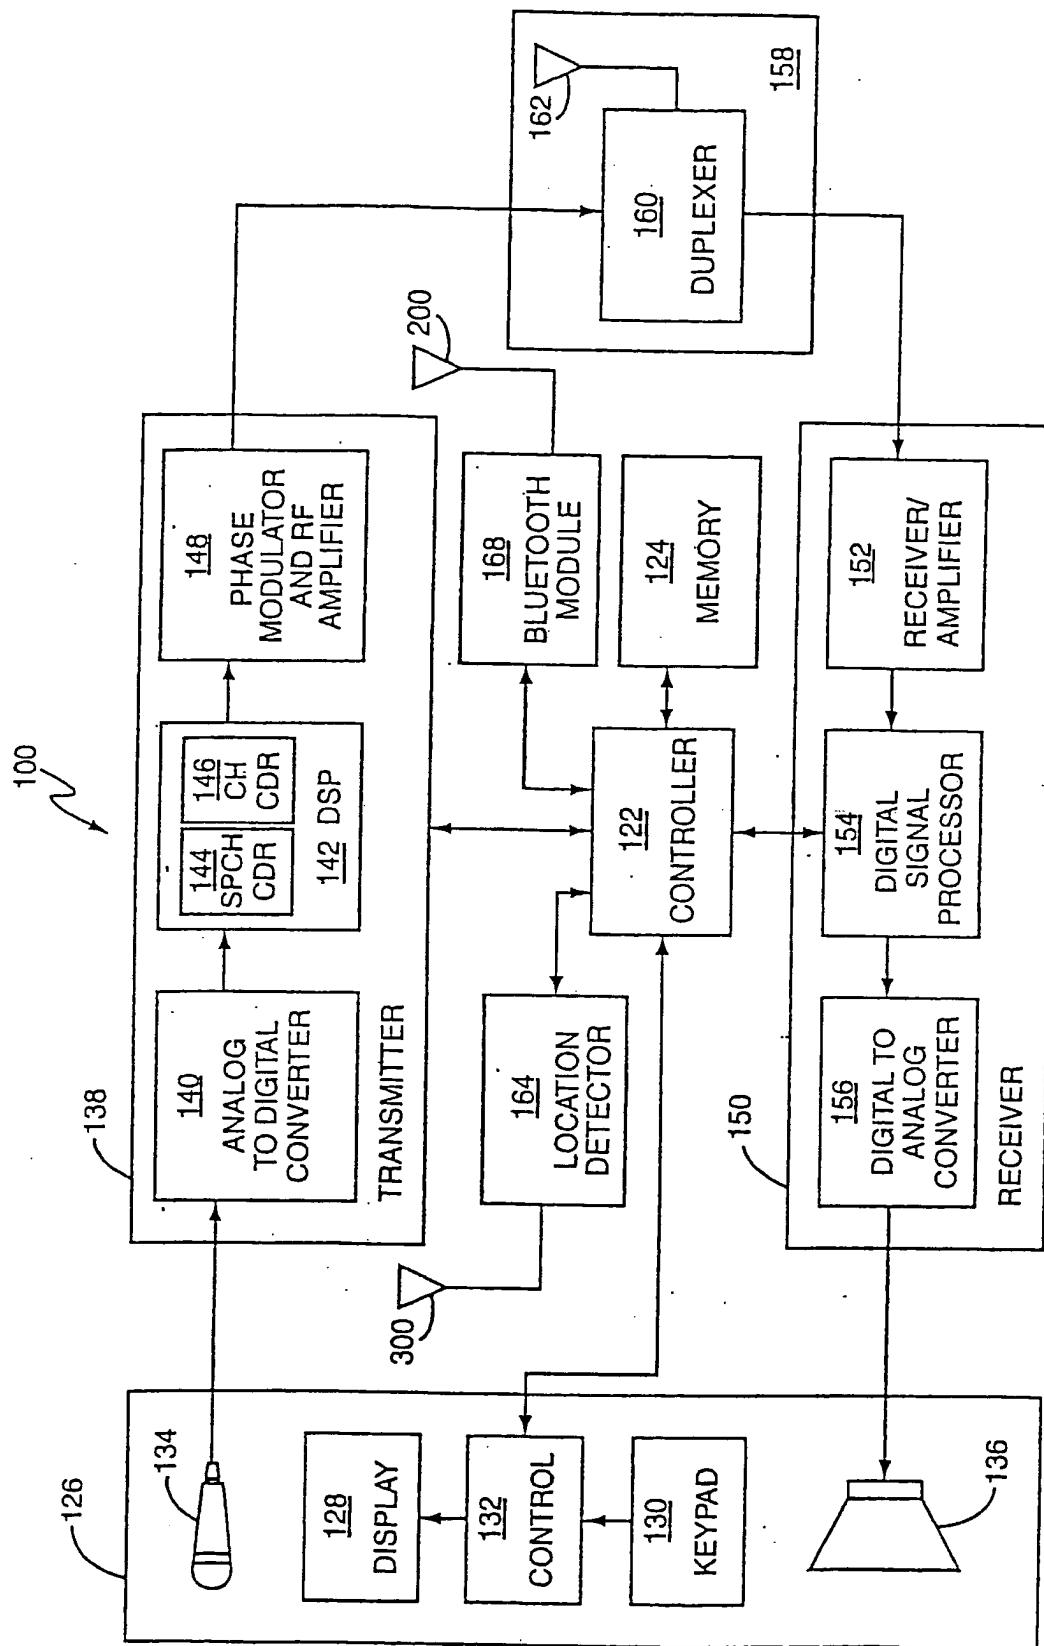


FIG. 2

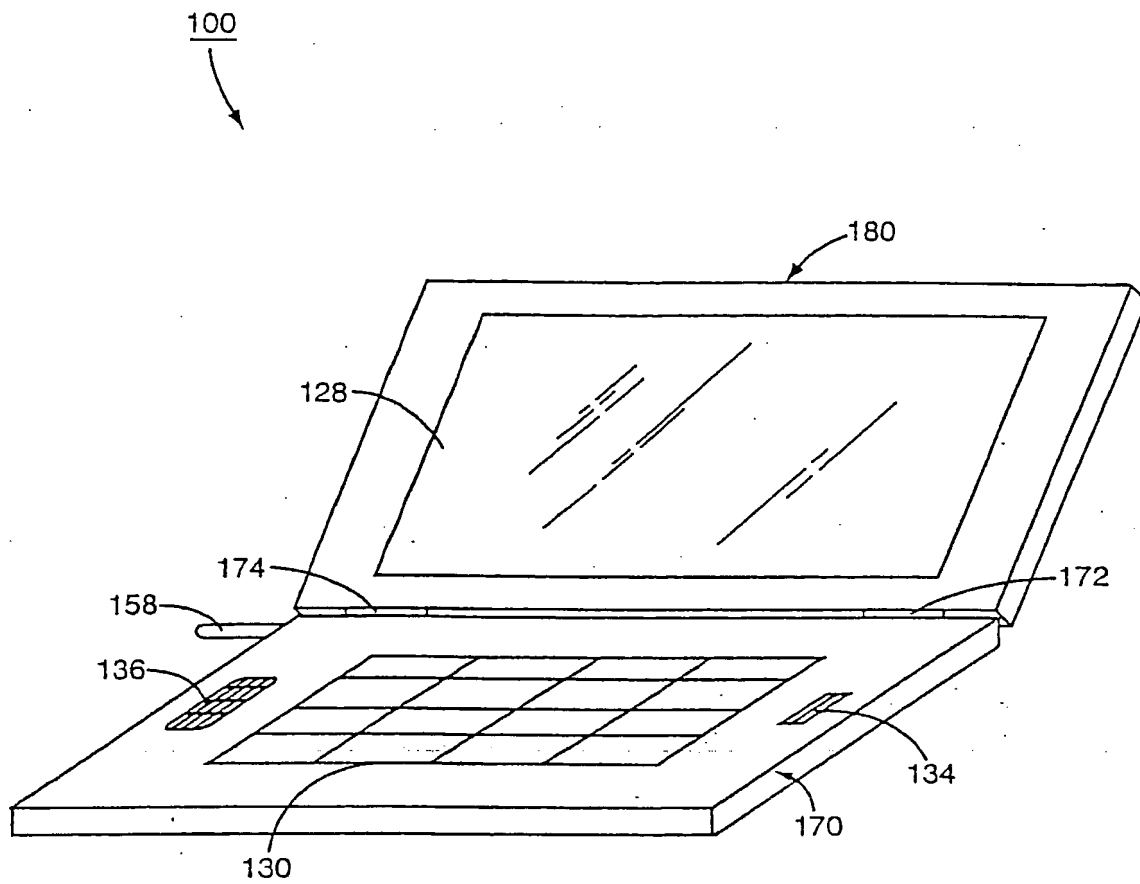
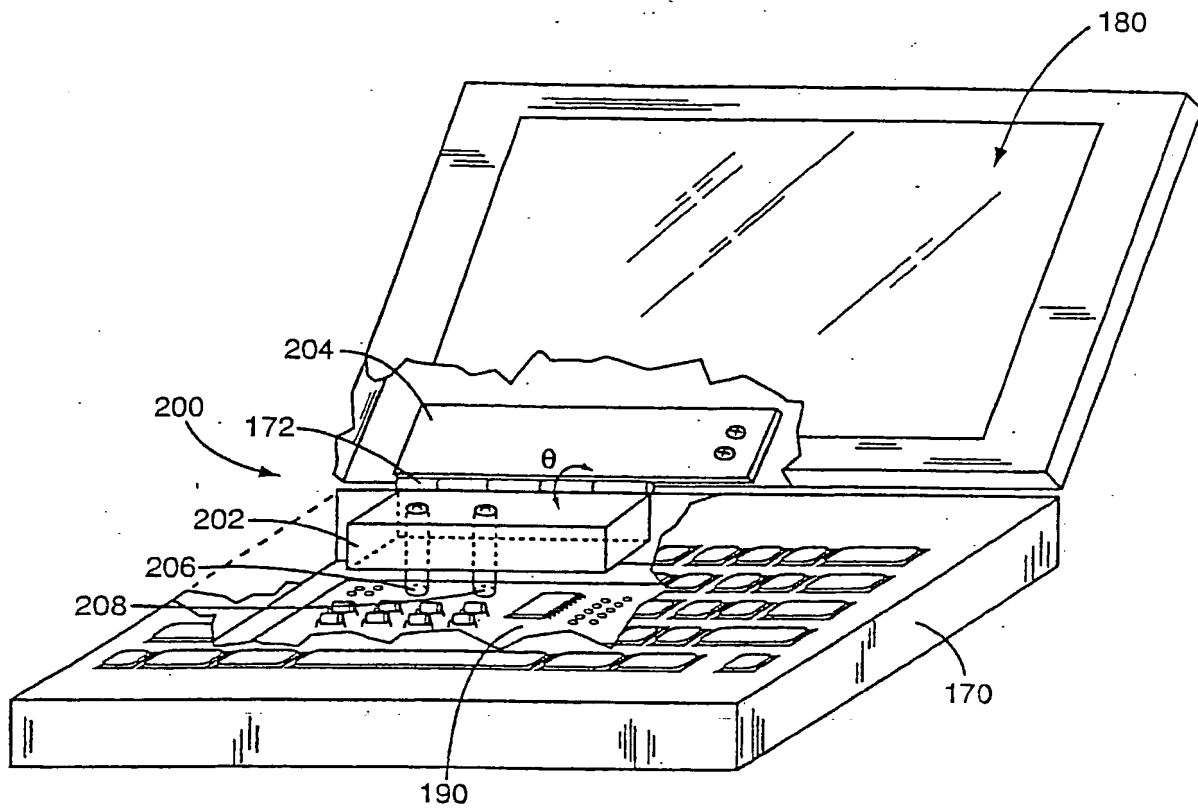
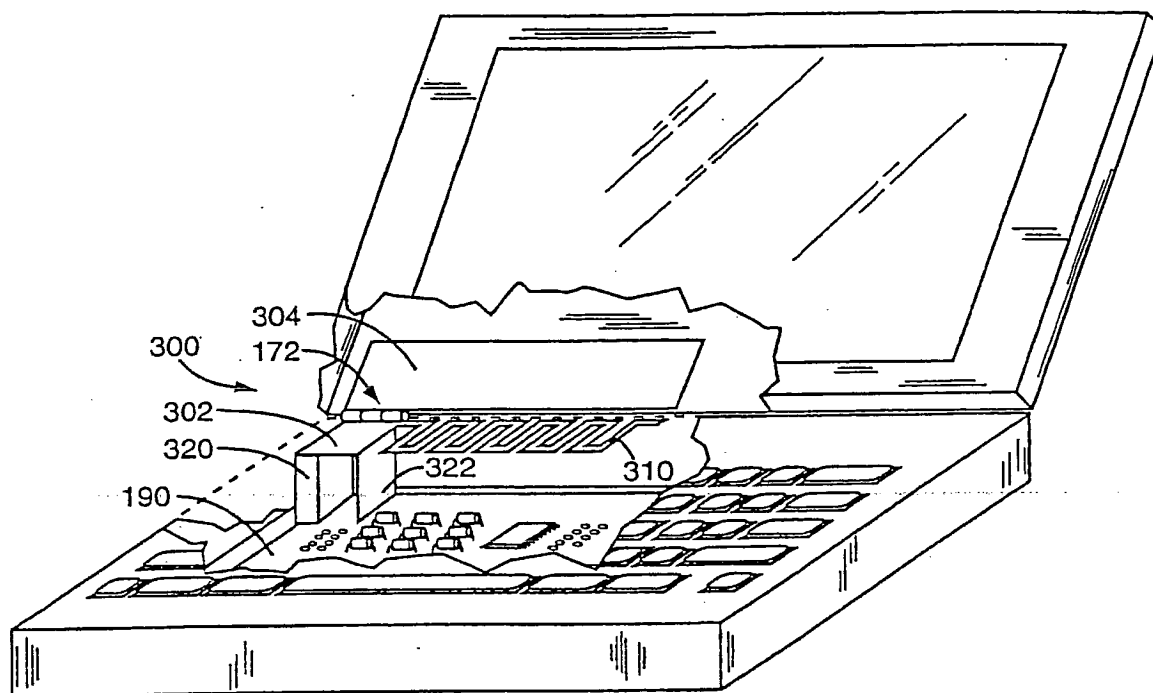


FIG. 3



**FIG. 5**

INTERNATIONAL SEARCH REPORT

Int lonal Application No

PCT/US 01/26732

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01Q1/22 H01Q1/24 H01Q1/08 H01Q9/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 561 437 A (KRENZ ERIC L ET AL) 1 October 1996 (1996-10-01) column 3, line 27 -column 5, line 34; claims 1-18; figures 1-9	1,13,19, 21,22
Y	US 5 138 328 A (HAMILTON ROBERT W ET AL) 11 August 1992 (1992-08-11) column 2, line 5 - line 29; figures 1-4	1,13,19, 21,22
A	US 5 184 143 A (MARKO PAUL D) 2 February 1993 (1993-02-02) the whole document	1-24
P,X	US 6 181 284 B1 (KUNZ RYAN ET AL) 30 January 2001 (2001-01-30) column 1, line 42 -column 12, line 38; figures 1-12	1,13,19, 21,22

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

19 February 2002

Date of mailing of the international search report

27/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Angrabeit, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/26732

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5561437	A	01-10-1996	BR 9504663 A 08-10-1996
		CA 2156353 A1 16-03-1996	
		CN 1130854 A ,B 11-09-1996	
		DE 19532127 A1 28-03-1996	
		FR 2724771 A1 22-03-1996	
		GB 2293275 A ,B 20-03-1996	
		JP 8097622 A 12-04-1996	
		KR 184927 B1 15-05-1999	
		SG 32495 A1 13-08-1996	
US 5138328	A	11-08-1992	NONE
US 5184143	A	02-02-1993	CA 1326291 A1 18-01-1994
US 6181284	B1	30-01-2001	NONE

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 March 2002 (28.03.2002)


PCT

(10) International Publication Number
WO 02/25769 A1


- (51) International Patent Classification⁷: **H01Q 1/22.** (74) Agents: **BENNETT, David, E. et al.**; Coats & Bennett, PLLC, P.O. Box 5, Raleigh, NC 27602 (US).
1/24, 1/08, 9/04
- (21) International Application Number: **PCT/US01/26732**
- (22) International Filing Date: **28 August 2001 (28.08.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/668,448 **22 September 2000 (22.09.2000)** **US**
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L.M. ERICSSON [SE/SE];**
Telefonplan, S-126 25 Stockholm (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ALI, Mohammad**
[CA/US]; 1231C Patrick Circle, Cary, NC 27511 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **INVERTED-F ANTENNA FOR FLIP-STYLE MOBILE TERMINALS**

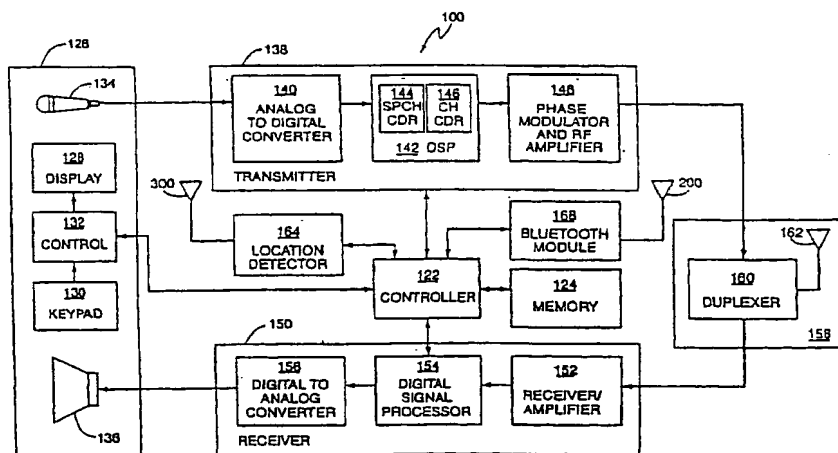

(57) Abstract: A flip or clam-shell style mobile terminal comprises a mechanical hinge that doubles as an inverted-F antenna for auxiliary communication purposes such as with a Bluetooth transceiver of a GPS receiver.

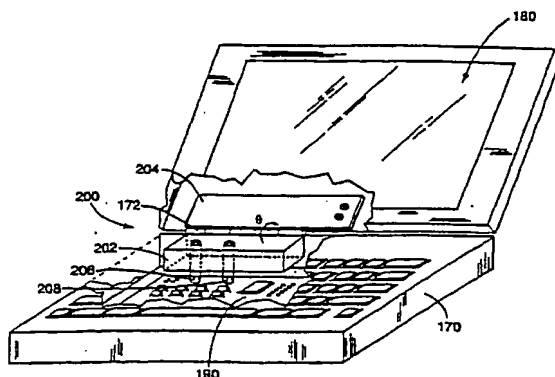

WO 02/25769 A1



Published:

- with international search report
- with amended claims and statement

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Date of publication of the amended claims and statement:

27 June 2002

AMENDED CLAIMS

[received by the International Bureau on 1 April 2002 (01.04.02);
original claims 19 and 21-24 amended; remaining claims unchanged (2 pages)]

17. The method of claim 13 wherein fastening an antenna to said printed circuit board comprises using a first fastener as a connection to ground and using a second fastener as an RF feed.

5 18. The method of claim 13 further comprising opening and closing said hinge during operation of the mobile terminal.

19. The mobile terminal of claim 1 further comprising:

10 a printed circuit board positioned inside said body wherein said hinge forms an inverted-F antenna and hingedly secures said flip portion to said body, and wherein said hinge is electrically coupled to said printed circuit board.

20. The mobile terminal of claim 19 further comprising a voice communication transceiver and a second antenna adapted for use with said voice communication

15 transceiver, said voice communication transceiver positioned within said body, and said second antenna spaced from said inverted-F antenna.

21. The method of claim 13 further comprising:

20 connecting said flip portion to a body portion of the mobile terminal using said hinge that also comprises said antenna.

22. The mobile terminal of claim 1 wherein said antenna is operatively connected to said electronic circuit, said antenna for communications at a first operating frequency.

25 23. The mobile terminal of claim 22 further comprising a second antenna operatively connected to said electronic circuit, said second antenna for voice communications at a second operating frequency.

24. The mobile terminal of claim 22 wherein said antenna for communications at said first operating frequency comprises a bluetooth antenna.

STATEMENT UNDER ARTICLE 19

Independent claims 19, 21, 22 have been amended to depend from independent claims 1, 13, and 1, respectively. In addition, dependent claims 23-24 have been amended for clarity. As amended, there now remain two independent claims: independent claim 1 is an apparatus claim and independent claim 13 is a method of constructing an apparatus. Further, the independent claims are linked by the unified inventive concept of a hinge that comprises an antenna. Applicant notes that none of the art cited in the Search Report either shows or suggests, alone or in combination, the use of a hinge as an antenna. Accordingly, Applicant submits that claims 1-24 define the requisite novelty and inventive step over the art cited in the Search Report. Applicant therefore respectfully requests a favorable report.

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)